


Type	L	H	D	d _a	b _{max}	b _{min}	d _i
JUMBO M175	1750	600	250	45	160	145	45
JUMBO M175+1	1750	600	300	95	160	145	45
JUMBO M175+2	1750	600	350	145	160	145	45
JUMBO M175+3	1750	600	400	195	160	145	45
JUMBO M175+3	1750	600	450	245	160	145	45
M20	1750	200	250	45	160	145	45
M20+1	1750	200	300	95	160	145	45
M20+2	1750	200	350	145	160	145	45
M20+3	1750	200	400	195	160	145	45
M20+4	1750	200	450	245	160	145	45
M100	1000	300	250	45	160	145	45
M100+1	1000	300	300	95	160	145	45
M100+2	1000	300	350	145	160	145	45
M100+3	1000	300	400	195	160	145	45
M100+4	1000	300	450	245	160	145	45
M121	1000	300	300	45	210	195	45
PM100	1000	300	250	45	160	145	45

all dimensions in mm


EUROMAC 2	Annex 1 of European Technical Approval ETA – 05/0001
Normal (standard) shuttering elements	

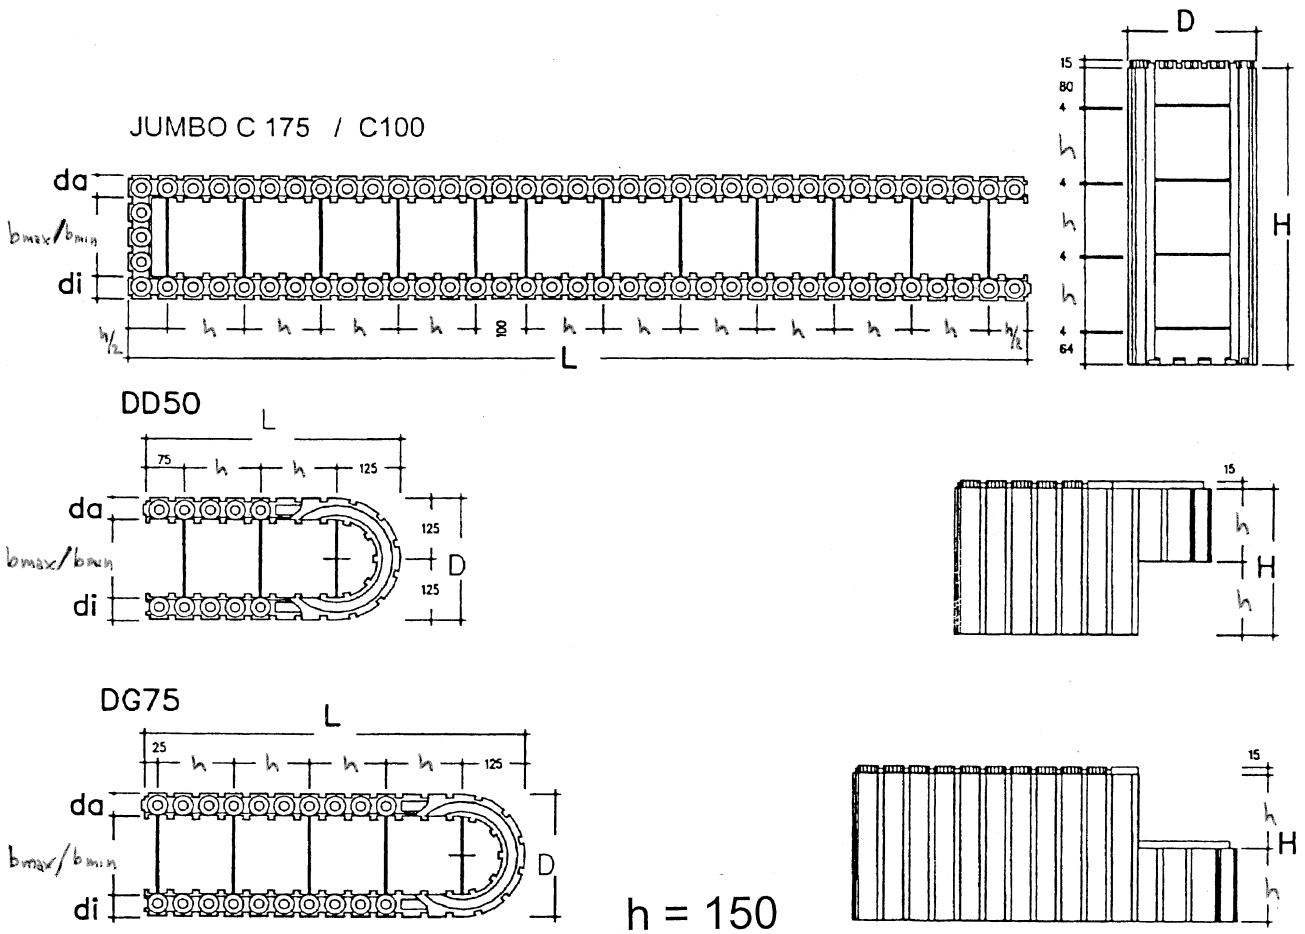


Type	L	H	D	d_a	b_{max}	b_{min}	d_i
JUMBO C175	1750	600	250	45	160	145	45
DD50	500	300	250	45	160	145	45
DG75	750	300	250	45	160	145	45
C100	1000	300	250	45	160	145	45

all dimensions in mm


EUROMAC 2	Annex 2 of European Technical Approval ETA – 05/0001
Special shuttering elements	

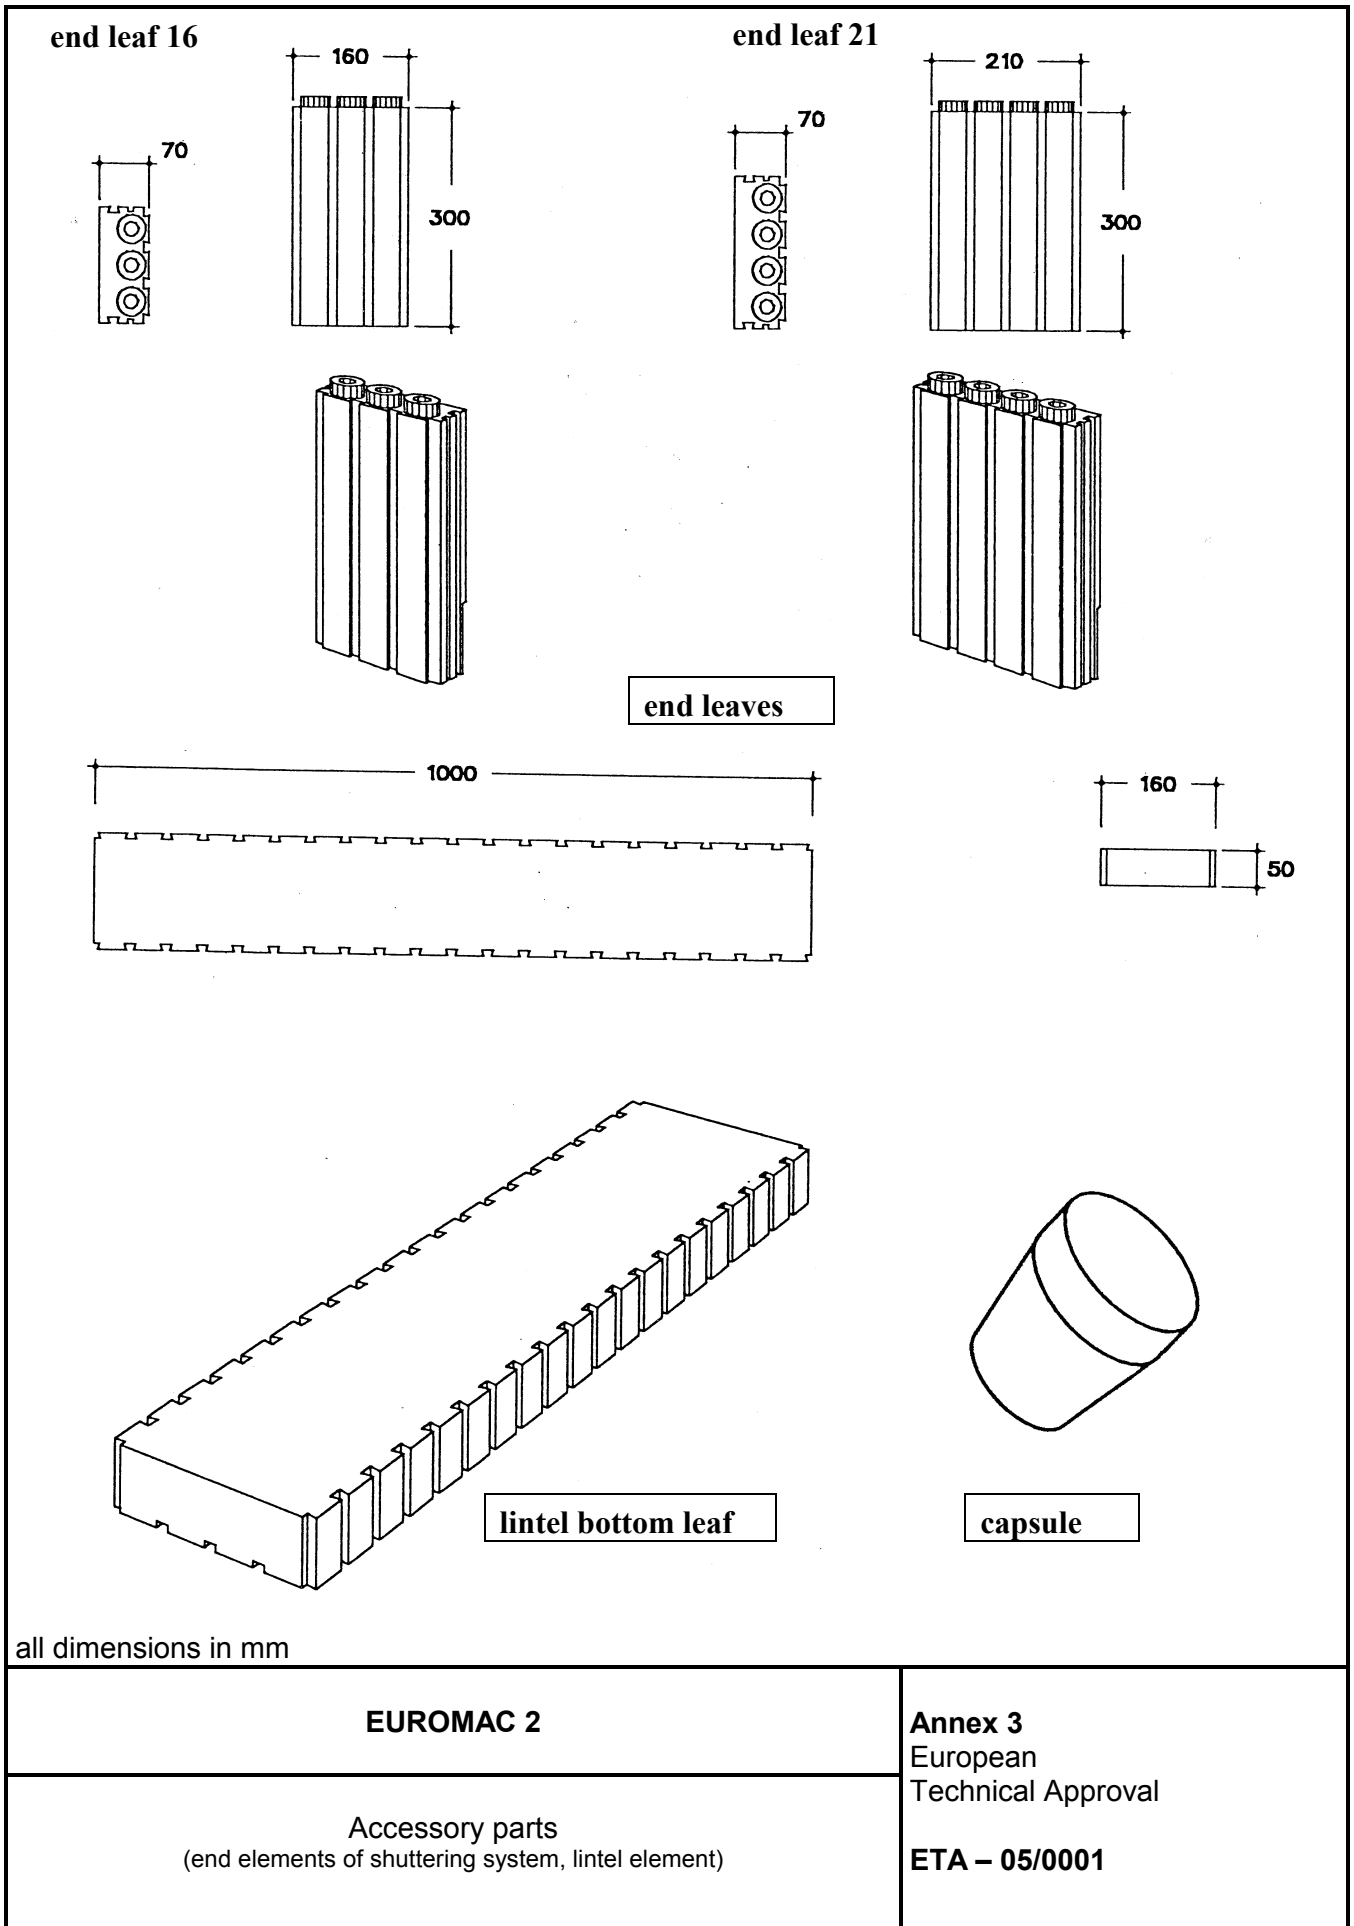

1st layer

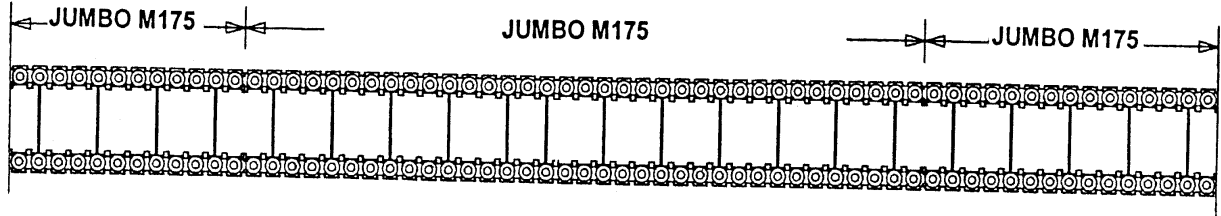

2nd layer

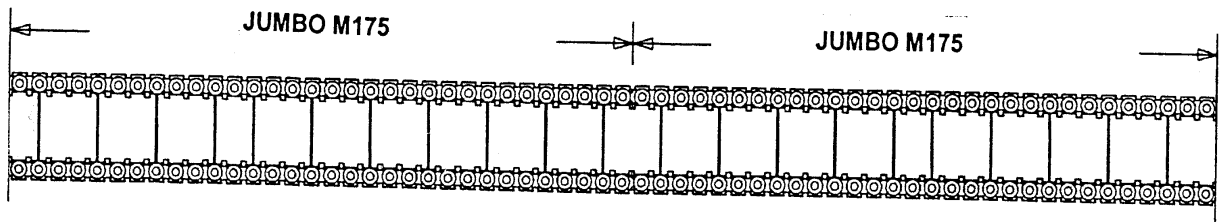


EUROMAC 2

Structure of layer on a straight wall


Annex 4
of European
Technical Approval

ETA – 05/0001

1st layer

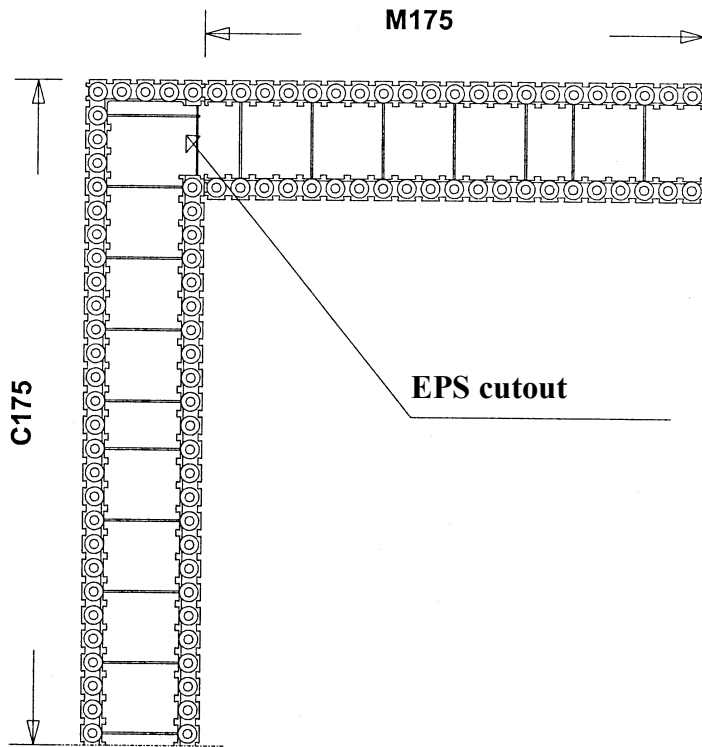

2nd layer

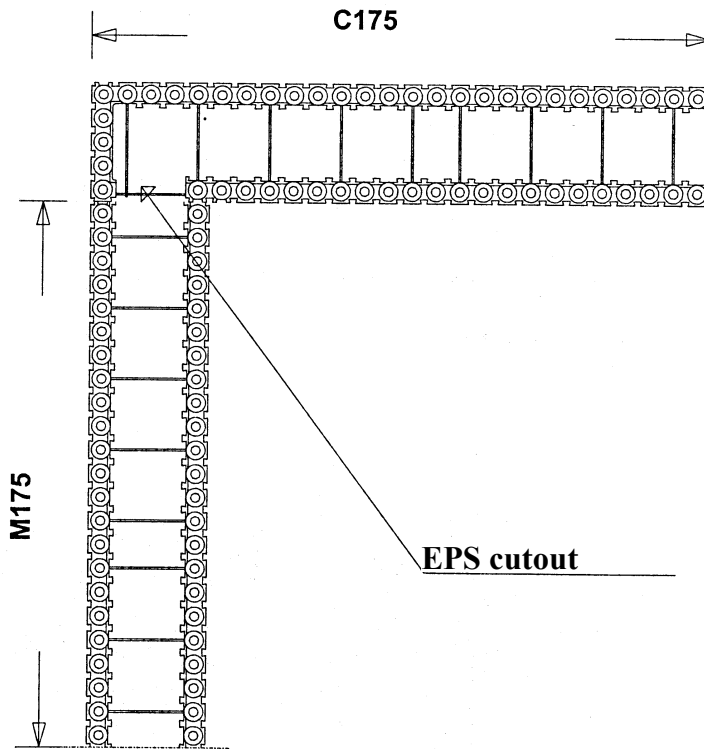


EUROMAC 2

Structure of layer on a rectangular wall corner


Annex 5
of European
Technical Approval

ETA – 05/0001

1st layer

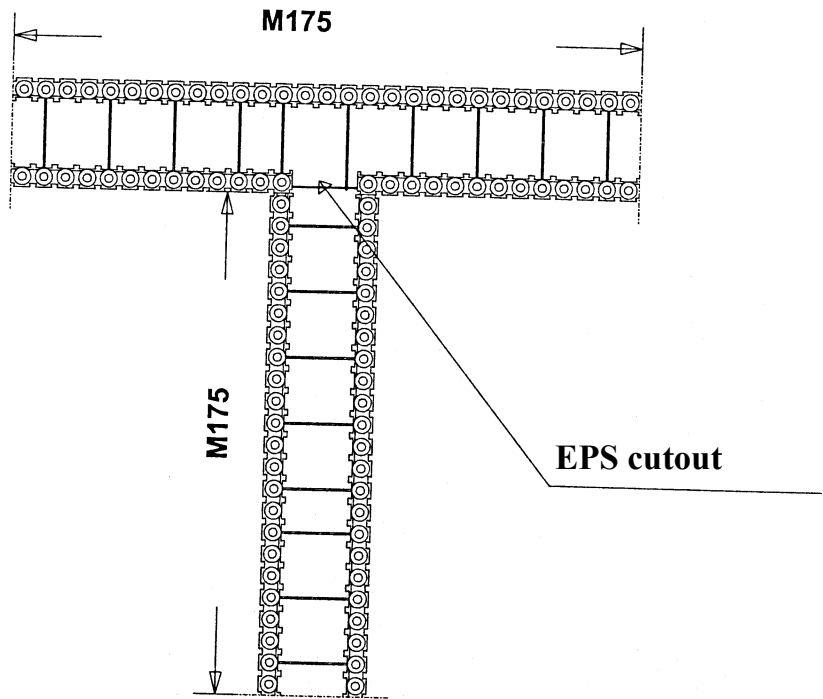

2nd layer

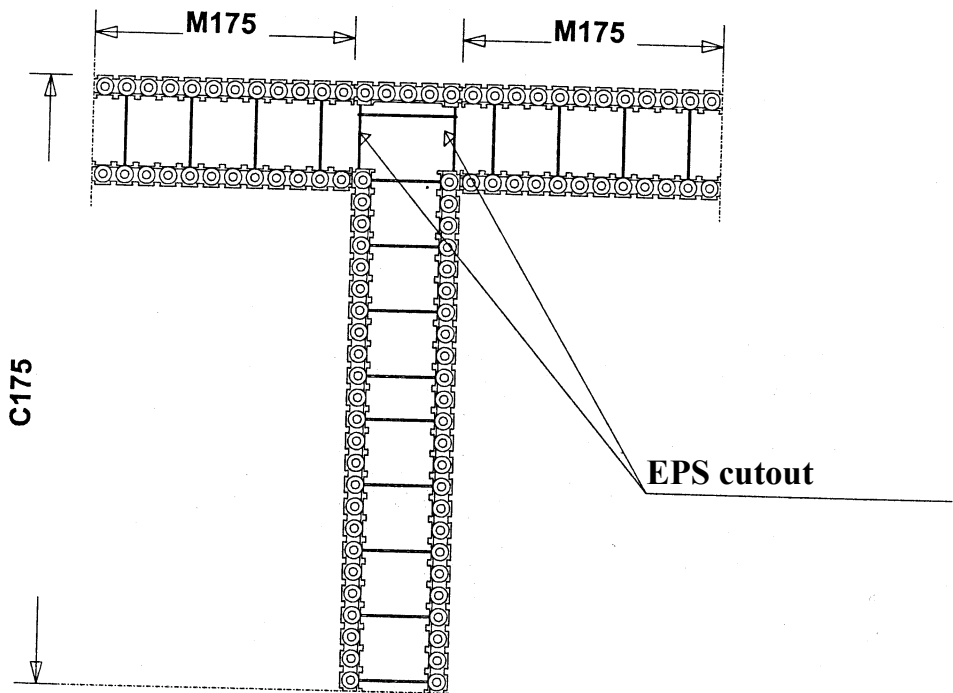


EUROMAC 2

Structure of layer at wall junctions


Annex 6
of European
Technical Approval

ETA – 05/0001

1st layer

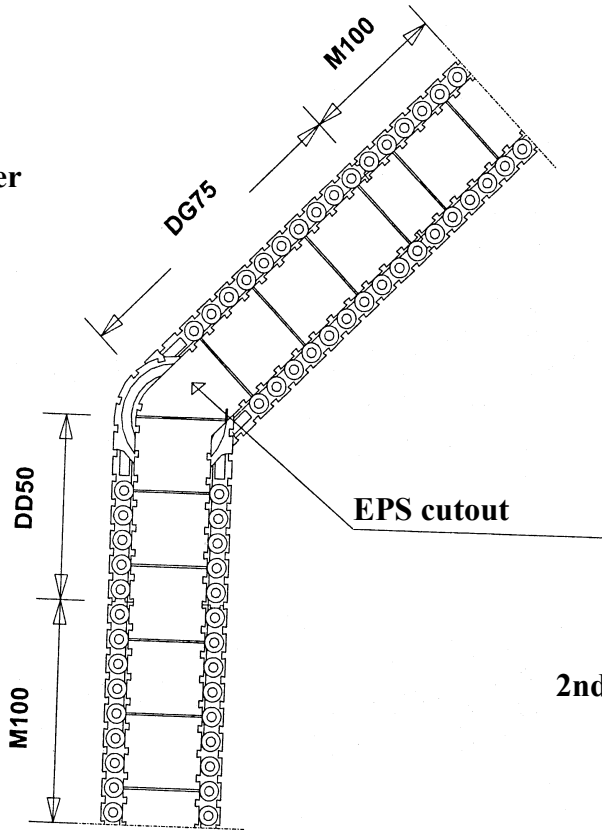

2nd layer

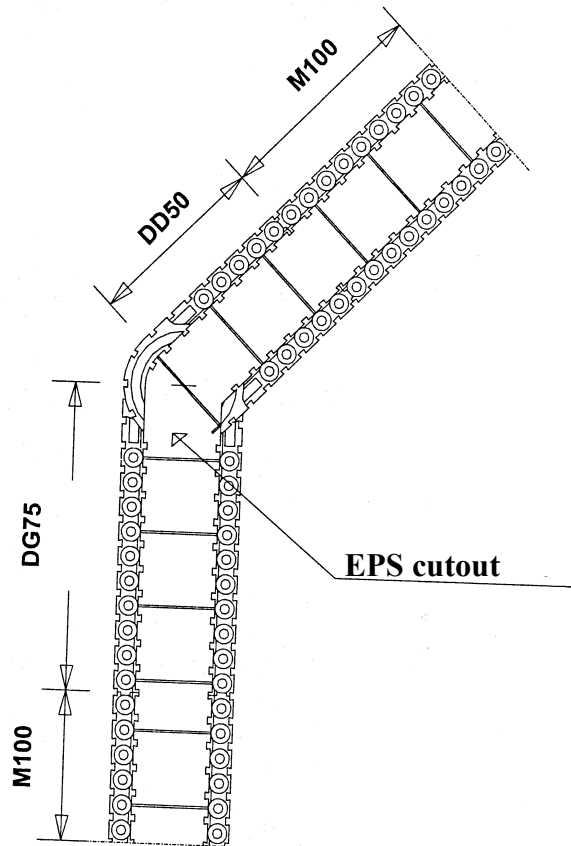


EUROMAC 2

Structure of layer at wall corners of arbitrary angle

Annex 7
of European
Technical Approval

ETA – 05/0001

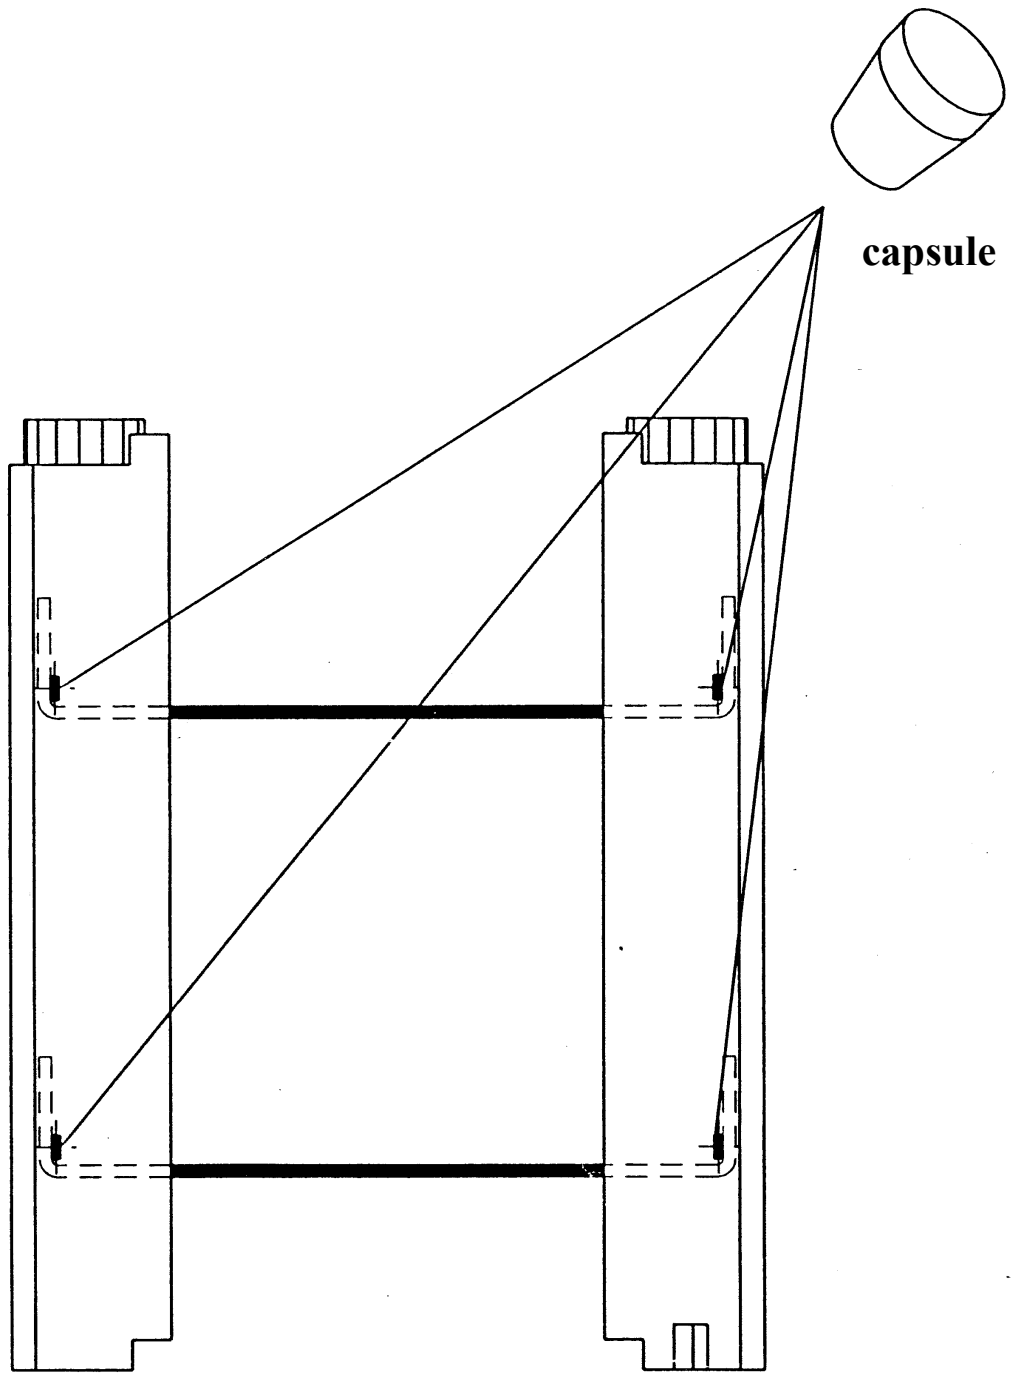

Plastic capsule to cover the flat steels of the ladders on cutting edges

EUROMAC 2	Annex 8 of European Technical Approval ETA – 05/0001
Plastic capsule	

TYPE	In accordance with	wall thickness cm	average core thickness m	core area m ² /m	volume of core concrete m ³ /m ²	calculation weight of shuttering elements without rendering kN/m ²	weight of wall filled with concrete (assumed density of 2.500 kg/m ³) without rendering kN/m ²
JUMBO C 175	2	25	0.155	0.155	0.155	0.065	3.94
JUMBO M 175	1	25	0.155	0.155	0.155	0.065	3.94
JUMBO M 175+1	1	30	0.155	0.155	0.155	0.08	3.96
JUMBO M 175+2	1	35	0.155	0.155	0.155	0.095	3.97
JUMBO M 175+3	1	40	0.155	0.155	0.155	0.11	3.99
JUMBO M 175+4	1	45	0.155	0.155	0.155	0.125	4.00
JUMBO M 20	1	25	0.155	0.155	0.155	0.065	3.94
JUMBO M 20+1	1	30	0.155	0.155	0.155	0.08	3.96
JUMBO M 20+2	1	35	0.155	0.155	0.155	0.095	3.97
JUMBO M 20+3	1	40	0.155	0.155	0.155	0.11	3.99
JUMBO M 20+4	1	45	0.155	0.155	0.155	0.125	4.00
M100	1	25	0.155	0.155	0.155	0.065	3.94
M100+1	1	30	0.155	0.155	0.155	0.08	3.96
M100+2	1	35	0.155	0.155	0.155	0.095	3.97
M100+3	1	40	0.155	0.155	0.155	0.11	3.99
M100+4	1	45	0.155	0.155	0.155	0.125	4.00
C100	2	25	0.155	0.155	0.155	0.065	3.94
M121	1	30	0.205	0.205	0.205	0.065	3.94
PM100	1	25	0.155	0.155	0.155	0.065	3.94
DG75	2	25	0.155	0.155	0.155	0.065	3.94
DD50	2	25	0.155	0.155	0.155	0.065	3.94
DS50	2	25	0.155	0.155	0.155	0.065	3.94

EUROMAC 2

Dimensions and weights for the structural design
(Weights has determined with a specific gravity of 25 kN/m³ for
concrete)

Annex 9
of European
Technical Approval

ETA – 05/0001